

Q8H Series




Constant Current LED Driver

LED恒流驱动器

Features:

- Constant current driver
- Independent compact design
- Captured terminal screws
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV class II output

- 恒流驱动
- 超小体积，独立式紧凑型设计
- 螺丝锁紧大接线端子，方便多规格线接驳
- 高功率因数设计
- 高效率，温升低
- 输出开路，短路，过载和超温保护
- SELV和II类等级

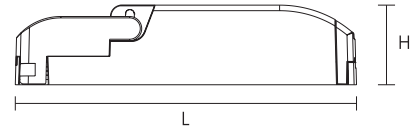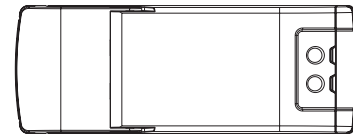

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
Q8H-180mA-9W	220-240	9	180	17-50	0.95	<20	83	<0.5	-20...+50	80	SELV	109x40x22	70
Q8H-230mA-12W	220-240	12	230	17-52	0.95	<20	84	<0.5	-20...+50	80	SELV	109x40x22	70
Q8H-260mA-12W	220-240	12	260	15-46	0.95	<20	83	<0.5	-20...+50	80	SELV	109x40x22	70
Q8H-350mA-12W	220-240	12	350	12-35	0.95	<20	83	<0.5	-20...+50	80	SELV	109x40x22	70
Q8H-500mA-12W	220-240	12	500	8-24	0.95	<20	82	<0.5	-20...+50	80	SELV	109x40x22	70
Q8H-700mA-12W	220-240	12	700	6-17	0.95	<20	82	<0.5	-20...+50	80	SELV	109x40x22	70
Q8H-250mA-20W	220-240	20	250	26-80	0.95	<15	88	<0.5	-20...+50	80	SELV	120x45x28	95
Q8H-300mA-20W	220-240	20	300	22-67	0.95	<15	88	<0.5	-20...+50	80	SELV	120x45x28	95
Q8H-350mA-20W	220-240	20	350	19-57	0.95	<15	88	<0.5	-20...+50	80	SELV	120x45x28	95
Q8H-450mA-20W	220-240	20	450	15-45	0.95	<15	87	<0.5	-20...+50	80	SELV	120x45x28	95
Q8H-500mA-20W	220-240	20	500	14-40	0.95	<15	87	<0.5	-20...+50	80	SELV	120x45x28	95
Q8H-700mA-20W	220-240	20	700	10-29	0.95	<15	86	<0.5	-20...+50	80	SELV	120x45x28	95