

V7 Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Super compact design
- Driver for built-in use
- Suitable for protection class I and II luminaires
- High power factor
- Low ripple current, flicker-free
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 紧凑型设计
- 内置式驱动
- 适用I类和II类灯具
- 高功率因数设计
- 低纹波电流, 无频闪
- 输出开路, 短路, 过载和超温保护
- 符合安全特低电压标准
- 保护等级II

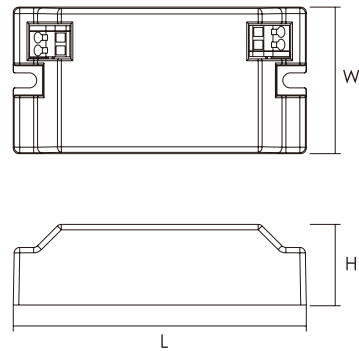

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output power 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
V7-10-260	220-240	10	260	20-39	0.90C	85	<0.3	-20...+50	80	SELV	80x40x22	50
V7-10-300	220-240	10	300	17-34	0.90C	85	<0.3	-20...+50	80	SELV	80x40x22	50
V7-10-350	220-240	10	350	15-29	0.90C	85	<0.3	-20...+50	80	SELV	80x40x22	50
V7-10-500	220-240	10	500	10-20	0.90C	84	<0.3	-20...+50	80	SELV	80x40x22	50
V7-12-700	220-240	12	700	6-17	0.90C	83	<0.3	-20...+50	80	SELV	80x40x22	50
V7-15-260	220-240	15	260	29-58	0.90C	85	<0.3	-20...+50	80	SELV	80x40x22	50
V7-15-300	220-240	15	300	25-50	0.90C	85	<0.3	-20...+50	80	SELV	80x40x22	50
V7-15-350	220-240	15	350	22-43	0.90C	85	<0.3	-20...+50	80	SELV	80x40x22	50
V7-15-500	220-240	15	500	15-30	0.90C	84	<0.3	-20...+50	80	SELV	80x40x22	50
V7-15-700	220-240	15	700	11-22	0.90C	83	<0.3	-20...+50	80	SELV	80x40x22	50

