

## V8 Series



# Constant Current LED Driver

LED恒流驱动器

## Features:

- Independent compact design
- Constant current driver
- Captured terminal screws
- High power factor
- Low ripple current, flicker-free
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 独立式紧凑型设计
- 恒流驱动
- 螺丝锁紧大接线端子，方便多规格线接驳
- 高功率因数设计
- 低纹波电流，无频闪
- 输出开路，短路，过载和超温保护
- 符合安全特低电压标准
- 保护等级II

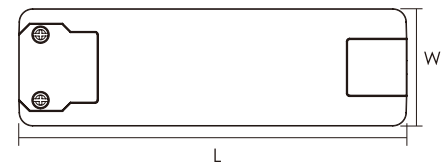

## Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
V8-25-350	220-240	25	350	36-71	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	85
V8-25-500	220-240	25	500	25-50	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	85
V8-25-600	220-240	25	600	21-42	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	85
V8-25-700	220-240	25	700	18-36	0.95	<15	87	<0.5	-20...+50	80	SELV	127x43x28	85
V8-25-800	220-240	25	800	16-31	0.95	<15	87	<0.5	-20...+50	80	SELV	127x43x28	85
V8-25-1050	220-240	25	1050	12-24	0.95	<15	86	<0.5	-20...+50	80	SELV	127x43x28	85
V8-30-350	220-240	30	350	43-86	0.95	<15	89	<0.5	-20...+50	80	SELV	127x43x28	105
V8-30-500	220-240	30	500	30-60	0.95	<15	89	<0.5	-20...+50	80	SELV	127x43x28	105
V8-30-700	220-240	30	700	21-43	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	105
V8-30-1050	220-240	30	1050	14-29	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	105
V8-30-1200	220-240	30	1200	13-25	0.95	<15	87	<0.5	-20...+50	80	SELV	127x43x28	105
V8-40-350	220-240	40	350	57-114	0.95	<15	89	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-500	220-240	40	500	40-80	0.95	<15	89	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-700	220-240	40	700	29-57	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-800	220-240	40	800	25-50	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-850	220-240	40	850	24-47	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-900	220-240	40	900	22-44	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-950	220-240	40	950	21-42	0.95	<15	88	<0.5	-20...+50	90	SELV	127x43x28	125
V8-40-1050	220-240	40	1050	19-38	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	125
V8-40-1400	220-240	40	1400	14-29	0.95	<15	88	<0.5	-20...+50	80	SELV	127x43x28	125
V8-45-700	220-240	45	700	32-64	0.95	<15	89	<0.5	-20...+50	85	SELV	127x43x28	125
V8-45-1050	220-240	45	1050	21-43	0.95	<15	89	<0.5	-20...+50	85	SELV	127x43x28	125
V8-45-1200	220-240	45	1200	19-38	0.95	<15	88	<0.5	-20...+50	85	SELV	127x43x28	125
V8-45-1400	220-240	45	1400	16-32	0.95	<15	88	<0.5	-20...+50	85	SELV	127x43x28	125
V8-60-700	220-240	60	700	60-86	0.95	<15	89	<0.5	-20...+50	85	SELV	157x43x28	175
V8-60-1050	220-240	60	1050	40-57	0.95	<15	88	<0.5	-20...+50	85	SELV	157x43x28	175
V8-60-1200	220-240	60	1200	35-50	0.95	<15	88	<0.5	-20...+50	85	SELV	157x43x28	175
V8-60-1400	220-240	60	1400	30-43	0.95	<15	89	<0.5	-20...+50	85	SELV	157x43x28	175



Constant Current LED Driver