

## V8 Series

# Constant Current LED Driver


LED恒流驱动器

## Features:

- Independent compact design
- Constant current driver
- Captured terminal screws
- High power factor
- Low ripple current, flicker-free
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II



- 独立式紧凑型设计
- 恒流驱动
- 螺丝锁紧大接线端子，方便多规格线接驳
- 高功率因数设计
- 低纹波电流，无频闪
- 输出开路，短路，过载和超温保护
- 符合安全特低电压标准
- 保护等级II

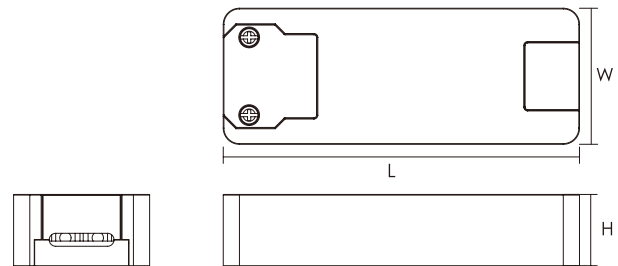

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
V8-10-260	220-240	10	260	20-39	0.90C	85	<0.3	-20...+50	80	SELV	110x42x22	50
V8-10-300	220-240	10	300	17-34	0.90C	85	<0.3	-20...+50	80	SELV	110x42x22	50
V8-10-350	220-240	10	350	15-29	0.90C	84	<0.3	-20...+50	80	SELV	110x42x22	50
V8-10-500	220-240	10	500	10-20	0.90C	84	<0.3	-20...+50	80	SELV	110x42x22	50
V8-15-260	220-240	15	260	29-58	0.90C	85	<0.3	-20...+50	80	SELV	110x42x22	50
V8-15-300	220-240	15	300	25-50	0.90C	85	<0.3	-20...+50	80	SELV	110x42x22	50
V8-15-350	220-240	15	350	22-43	0.90C	85	<0.3	-20...+50	80	SELV	110x42x22	50
V8-15-500	220-240	15	500	15-30	0.90C	84	<0.3	-20...+50	80	SELV	110x42x22	50
V8-15-700	220-240	15	700	11-22	0.90C	84	<0.3	-20...+50	80	SELV	110x42x22	50
V8-20-350	220-240	20	350	29-57	0.90C	87	<0.5	-20...+50	80	SELV	110x42x22	75
V8-20-400	220-240	20	400	25-50	0.90C	87	<0.5	-20...+50	80	SELV	110x42x22	75
V8-20-500	220-240	20	500	20-40	0.90C	86	<0.5	-20...+50	80	SELV	110x42x22	75
V8-20-700	220-240	20	700	14-28	0.90C	86	<0.5	-20...+50	80	SELV	110x42x22	75


**CB CE**