

V7 Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Super compact design
- Driver for built-in use
- Suitable for protection class I and II luminaires
- High power factor
- Low ripple current, flicker-free
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II

- 紧凑型设计
- 内置式驱动
- 适用I类和II类灯具
- 高功率因数设计
- 低纹波电流, 无频闪
- 输出开路, 短路, 过载和超温保护
- 符合安全特低电压标准
- 保护等级II

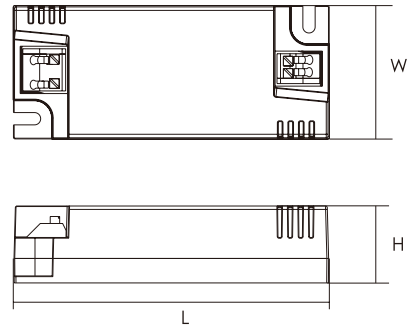

Parameters:

Model No.	Input voltage	Max. output	Output current	Output voltage	Power factor	THD	Efficiency full load	No-load power	Ambient temperature	Max. casing temperature	Isolation	Dimensions LxWxH	Weight
型号	额定电压 (V)	功率 (W)	输出电流 (mA)	输出电压 (V)	功率因数 (λ)	总谐波 (%)	效率 (%)	空载功率 (W)	环境温度 ta (°C)	最大外壳温度 tc (°C)	隔离	尺寸 (mm)	重量 (g)
V7-25-350	220-240	25	350	36-71	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	75
V7-25-450	220-240	25	450	28-56	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	75
V7-25-500	220-240	25	500	25-50	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	75
V7-25-600	220-240	25	600	21-42	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	75
V7-25-700	220-240	25	700	18-36	0.95	<15	87	<0.5	-20...+50	80	SELV	100x43x28	75
V7-25-1050	220-240	25	1050	12-24	0.95	<15	86	<0.5	-20...+50	80	SELV	100x43x28	75
V7-30-350	220-240	30	350	43-86	0.95	<15	89	<0.5	-20...+50	80	SELV	100x43x28	85
V7-30-500	220-240	30	500	30-60	0.95	<15	89	<0.5	-20...+50	80	SELV	100x43x28	85
V7-30-700	220-240	30	700	21-43	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	85
V7-30-1050	220-240	30	1050	14-29	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	85
V7-30-1200	220-240	30	1200	13-25	0.95	<15	87	<0.5	-20...+50	80	SELV	100x43x28	85
V7-40-350	220-240	40	350	57-114	0.95	<15	89	<0.5	-20...+50	80	SELV	100x43x28	100
V7-40-500	220-240	40	500	40-80	0.95	<15	89	<0.5	-20...+50	80	SELV	100x43x28	100
V7-40-700	220-240	40	700	29-57	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	100
V7-40-850	220-240	40	850	24-47	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	100
V7-40-900	220-240	40	900	22-44	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	100
V7-40-1050	220-240	40	1050	19-38	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	100
V7-40-1400	220-240	40	1400	14-29	0.95	<15	88	<0.5	-20...+50	80	SELV	100x43x28	100
V7-45-700	220-240	45	700	32-64	0.95	<15	89	<0.5	-20...+50	85	SELV	100x43x28	145
V7-45-1050	220-240	45	1050	21-43	0.95	<15	89	<0.5	-20...+50	85	SELV	100x43x28	145
V7-45-1200	220-240	45	1200	19-38	0.95	<15	88	<0.5	-20...+50	85	SELV	100x43x28	145
V7-45-1400	220-240	45	1400	16-32	0.95	<15	88	<0.5	-20...+50	85	SELV	100x43x28	145
V7-50-1050	220-240	50	1050	24-48	0.95	<15	89	<0.5	-20...+50	85	SELV	130x43x30	155
V7-60-700	220-240	60	700	60-86	0.95	<15	89	<0.5	-20...+50	85	SELV	130x43x30	155
V7-60-1050	220-240	60	1050	40-57	0.95	<15	88	<0.5	-20...+50	85	SELV	130x43x30	155
V7-60-1200	220-240	60	1200	35-50	0.95	<15	88	<0.5	-20...+50	85	SELV	130x43x30	155
V7-60-1400	220-240	60	1400	30-43	0.95	<15	89	<0.5	-20...+50	85	SELV	130x43x30	155



CBCE