


LLC Series Constant Current LED Driver/2-Channel

LED恒流驱动器

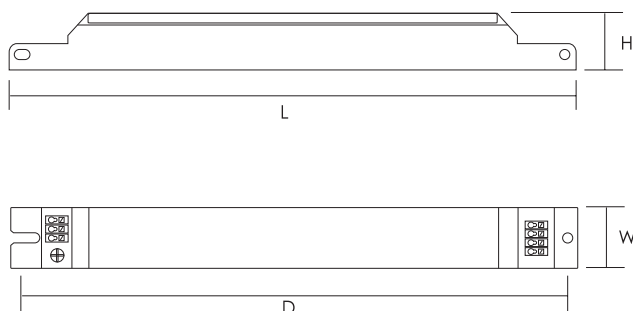

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
LLC2x350-35	220-240	35	2x350 1x700	25-50	0.98	<18	91	<2.0	-20...+50	75	SELV	280x30x28	270
LLC2x500-50	220-240	50	2x500 1x1000	25-50	0.98	<18	91	<3.0	-20...+50	75	SELV	280x30x28	270
LLC2x700-70	220-240	70	2x700 1x1400	25-50	0.98	<18	92	<3.0	-20...+50	75	SELV	280x30x28	270

- 2-channel ECG for constant operation of LED modules
- High efficiency up to 91%
- SELV equiv.output voltage≤60 VDC
- Soft start and low output current ripple
- For use in luminaires of protection class I
- Safe no-load operation
- Overload & Short circuiting protection
- Overheating protection

- 2路输出恒流驱动, 适用LED模组
- 高效率>91%
- 符合安全特低电压标准
- 软启动,低输出电流纹波
- 适用保护等级类的灯具产品
- 安全无负载保护装置
- 输出过载、短路保护
- 过温保护功能

