


# LCC Series Constant Current LED Driver

长条形LED恒流驱动器

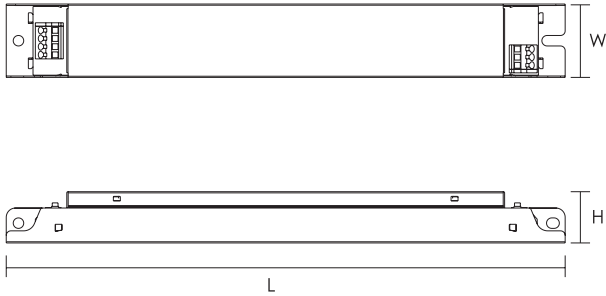

Model No. 型号	Dimming Mode 调光方式	Input voltage 额定电压 (V)	Max. output power 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
LCC1x20	N/A	220-240	20	350	2-60	0.95	<15	82	-20...+50	80	SELV	210x31x22	210
			20	500	2-40								
			20	700	2-30								
LCC1x40	N/A	220-240	28	350	10-80	0.95	<15	86	-20...+50	80	SELV	240x31x22	220
			40	500	10-80								
			40	700	10-60								
LCC1x70	N/A	220-240	1x70	700	40-100	0.95	<15	88	-20...+50	80	SELV	280x30x28	270
				1050	30-68								
LCC2x35	N/A	220-240	2x35	350	10-100	0.95	<15	88	-20...+50	80	SELV	280x30x28	270
				500	10-70								
				700	10-50								

- Super slim design
- Driver for built-in use
- Push wire connections
- Three fixed selectable output currents
- For use in luminaires of protection class I
- Low ripple of output current for a higher quality of light
- high power factor
- Open circuit, short circuit, over load protection
- Suitable for use in emergency lighting systems

- 超细长紧凑设计
- 内置式驱动
- 按压式接线端子
- 3组可选择电流输出
- 适用I类灯具
- 低电流纹波输出, 无频闪
- 高功率因数设计
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统

