

## LCS Series

# Constant Current LED Driver


LED恒流驱动器

## Features:

- Super slim design
- Driver for built-in use
- Push wire connections
- For use in luminaires of protection class I
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Suitable for use in emergency lighting systems
- SELV equivalent



- 超细长紧凑设计
- 内置式驱动
- 按压式接线端子
- 适用I类灯具
- 高功率因数设计
- 高效率, 温升低
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统
- SELV等级

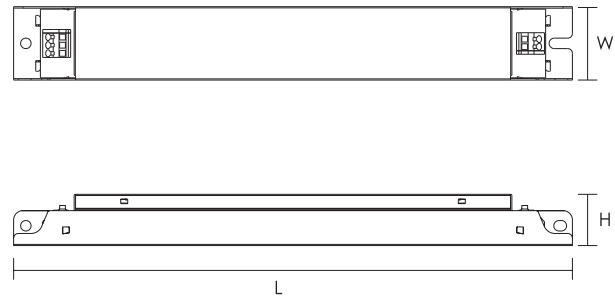

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
LCS-350mA-25W	220-240	25	350	24-72	0.95	<15	87	<0.5	-20...+50	75	SELV	210x31.5x22	170
LCS-700mA-25W	220-240	25	700	10-36	0.95	<15	86	<0.5	-20...+50	75	SELV	210x31.5x22	170
LCS-350mA-40W	220-240	40	350	39-114	0.95	<15	91	<0.5	-20...+50	80	SELV	240x31.5x22	205
LCS-475mA-40W	220-240	40	475	28-84	0.95	<15	91	<0.5	-20...+50	80	SELV	240x31.5x22	205
LCS-500mA-40W	220-240	40	500	27-80	0.95	<15	91	<0.5	-20...+50	85	SELV	240x31.5x22	205
LCS-700mA-40W	220-240	40	700	20-57	0.95	<15	91	<0.5	-20...+50	80	SELV	240x31.5x22	205
LCS-1050mA-40W	220-240	40	1050	12-38	0.95	<15	90	<0.5	-20...+50	80	SELV	240x31.5x22	205
LCS-1400mA-40W	220-240	40	1400	11-29	0.95	<15	89	<0.5	-20...+50	80	SELV	240x31.5x22	205
LCS-850mA-45W	220-240	45	850	17-53	0.95	<15	90	<0.5	-20...+50	85	SELV	240x31.5x22	210
LCS-1050mA-45W	220-240	45	1050	15-43	0.95	<15	90	<0.5	-20...+50	85	SELV	240x31.5x22	210
LCS-1050mA-60W	220-240	60	1050	20-57	0.95	<15	90	<0.5	-20...+50	85	SELV	280x38x28	300
LCS-1400mA-60W	220-240	60	1400	20-43	0.95	<15	89	<0.5	-20...+50	85	SELV	280x38x28	300
LCS-1400mA-65W	220-240	65	1400	20-46	0.95	<15	89	<0.5	-20...+50	85	SELV	280x38x28	330

