

## Q2 Series


# Constant Current LED Driver

LED恒流驱动器

## Features:

- Universal AC input
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Cooling by free air convection
- 100% full load burn-in test
- High efficiency, long life and high reliability
- IP67 design for indoor or outdoor

- 全电压输入规格AC100-240V
- 输出开路, 短路, 过载和超温保护
- 自然风冷
- 100%满载老化测试
- 高效率, 长寿命, 高可靠性
- IP67等级设计, 使用于室内和户外使用

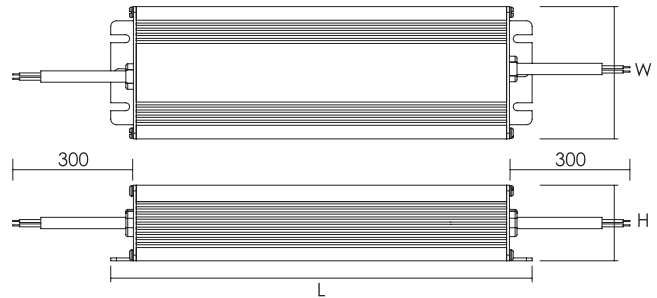

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions 尺寸 LxWxH (mm)	Weight 重量 (g)
Q2-500mA-28W	100-240	28	500	2-57	0.95	85	<1.0	-20...+50	75	SELV	169x55x30.5	480
Q2-350mA-40W	100-240	40	350	35-114	0.95	88	<1.0	-20...+50	80	SELV	169x55x30.5	480
Q2-700mA-40W	100-240	40	700	2-56	0.95	87	<1.0	-20...+50	75	SELV	169x55x30.5	480
Q2-1050mA-40W	100-240	40	1050	2-38	0.95	87	<1.0	-20...+50	75	SELV	169x55x30.5	480
Q2-1400mA-40W	100-240	40	1400	2-28	0.95	86	<1.0	-20...+50	75	SELV	169x55x30.5	480
Q2-1050mA-60W	100-240	60	1050	35-57	0.95	89	<1.0	-20...+50	75	SELV	186x64x39	780
Q2-1400mA-60W	100-240	60	1400	26-43	0.95	88	<1.0	-20...+50	75	SELV	186x64x39	780