

LCS Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Super slim design
- Driver for built-in use
- Push wire connections
- For use in luminaires of protection class I
- High power factor
- high efficiency
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Suitable for use in emergency lighting systems
- SELV equivalent

- 超细长紧凑设计
- 内置式驱动
- 按压式接线端子
- 适用I类灯具
- 高功率因数设计
- 高效率, 温升低
- 输出开路, 短路, 过载和超温保护
- 适用紧急照明控制系统
- SELV等

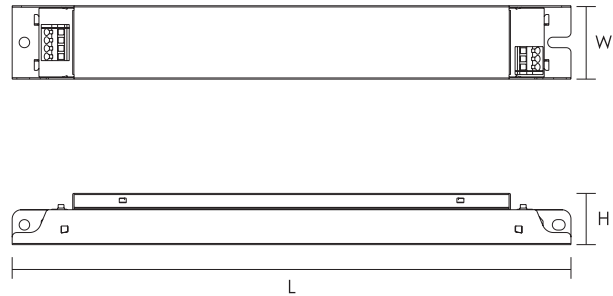

Parameters:

| Model No. | Input voltage | Max. output | Output current | Output voltage | Power factor | THD | Efficiency full load | No-load power | Ambient temperature | Max. casing temperature | Isolation | Dimensions LxWxH | Weight |
|----------------|---------------|-------------|----------------|----------------|--------------|---------|----------------------|---------------|---------------------|-------------------------|-----------|------------------|--------|
| 型号 | 额定电压 (V) | 功率 (W) | 输出电流 (mA) | 输出电压 (V) | 功率因数 (λ) | 总谐波 (%) | 效率 (%) | 空载功率 (W) | 环境温度 ta (°C) | 最大外壳温度 tc (°C) | 隔离 | 尺寸 (mm) | 重量 (g) |
| LCS-40-700/350 | 220-240 | 20 | 350 | 20-57 | 0.95 | <15 | 88 | <0.5 | -20...+50 | 85 | SELV | 240X31.5X22 | 205 |
| | | 40 | 700 | 20-57 | 0.95 | <15 | 88 | <0.5 | -20...+50 | 85 | SELV | | |